


THE DRAINAGE TRENCH IS TO WIDENED 200mm EACH SIDE FOR THE REINSTATEMENT OF THE ROAD PAVEMENT

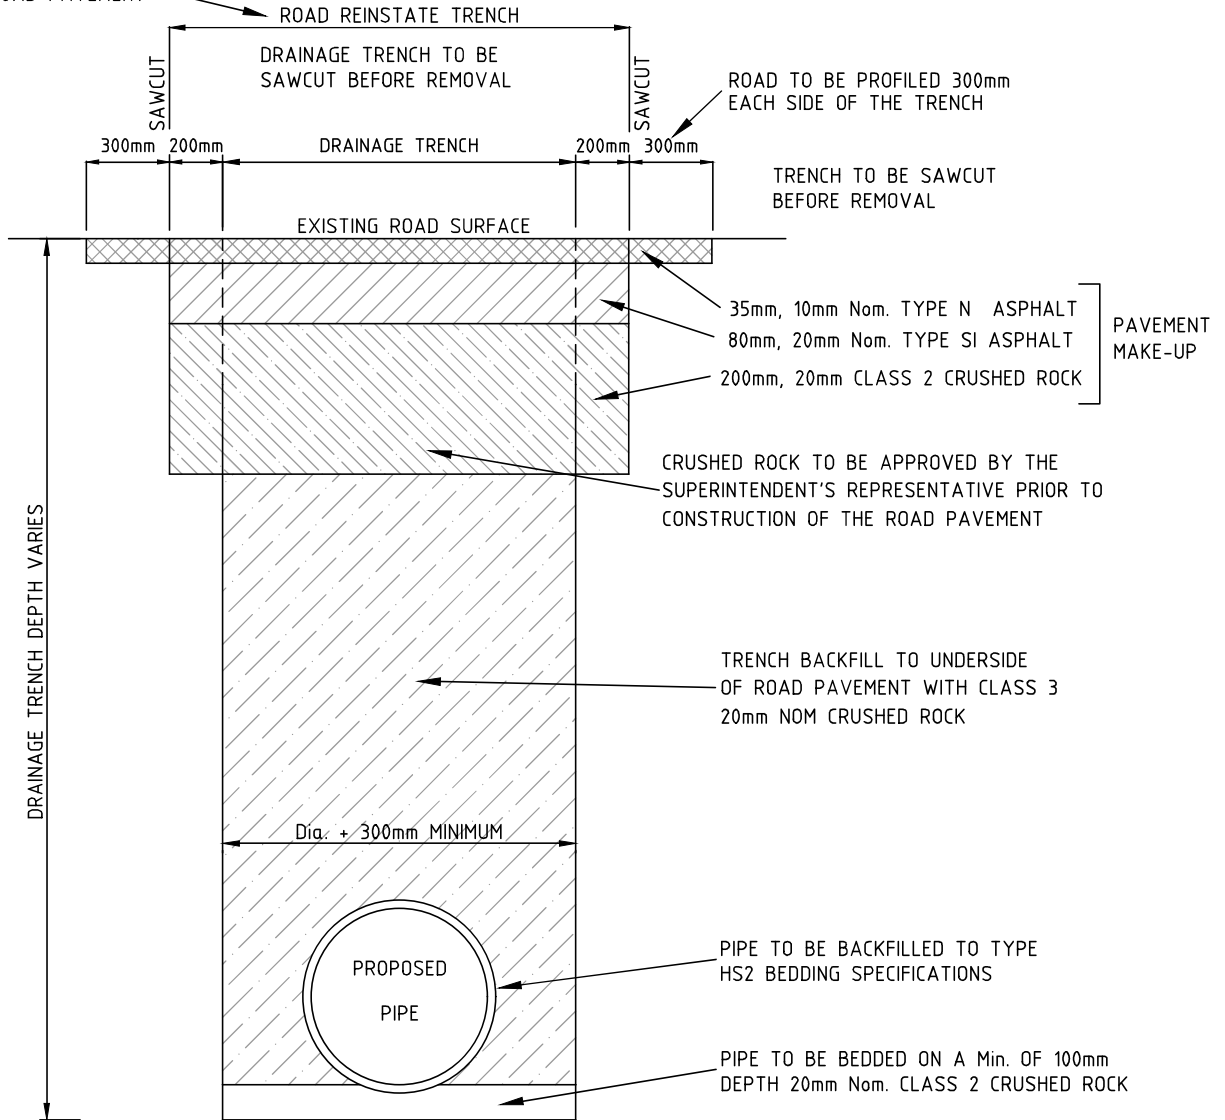

PIPE BACKFILL DETAILS  
IN ASPHALT ROAD PAVEMENT  
NOT TO SCALE

PIPE BACKFILL DETAILS

1. ALL PIPES LOCATED UNDER THE ROAD PAVEMENT TO HAVE THEIR TRENCHES NEATLY SAWCUT PRIOR TO REMOVAL WITH THE PIPES TO BE BACKFILLED AS PER THE DETAIL SHOWN ABOVE.
2. THE DRAINAGE TRENCH IS TO WIDENED AFTER THE DRAINAGE CONSTRUCTION TO ALLOW FOR THE REINSTATEMENT OF THE ROAD PAVEMENT AS SHOWN ABOVE. ANY WIDENING OF THE TRENCHES OVER THE DIMENSIONS AS SHOWN ABOVE IS TO BE AT THE CONTRACTORS EXPENSE.
3. FOR ALL OTHER ROAD TYPES PAVEMENT MAKEUP TO BE DIRECTED BY COUNCIL.

**KINGSTON CITY COUNCIL**  
**STANDARD DRAWING**

DRG. NO. **S505**

ISSUE DATE: 19/12/25

PIPE BACKFILL DETAIL RESIDENTIAL PAVEMENTS, UNDER KERB  
OR IN NATURESTRIPS WITHIN 1m OF BACK OF KERB.

STANDARD DRAWING ISSUE  
CURRENT AT TIME OF  
CONSTRUCTION MUST BE USED